


638 nm Single-Mode/Polarization-Maintaining Pigtail Laser

Dimensions

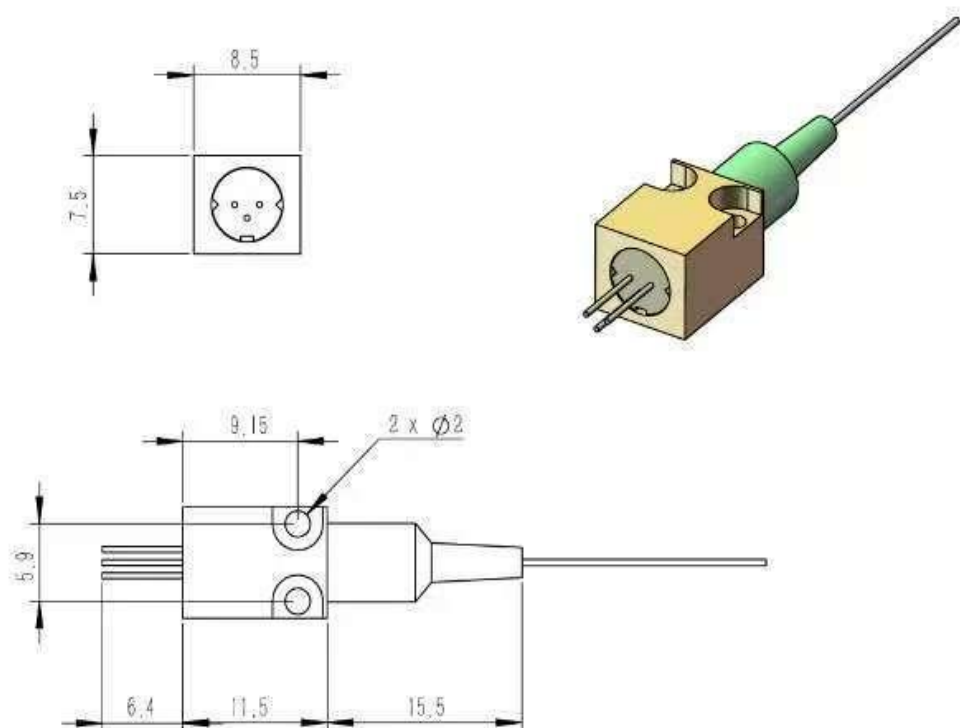

Features:

- High output power
- Excellent beam quality
- High reliability

Applications:

- Raman spectroscopy
- Biometric detection
- Precision measurement

638 nm Single-Mode/Polarization-Maintaining Pigtail Laser

Specifications

Parameters	Min.	Typical	Max.	Test Conditions
Optical Properties				
Center Wavelength	635nm	638nm	643nm	At Po = 120mW & Tcase = 25°C
Output Power (Po)		110mW	120mW	At Tcase = 25°C, Iop = 260mA
Power Stability			±1%	
Beam Quality (M ²)			1.1	
Operating Temperature (Tcase)	-10°C	25°C	45°C	Using a base with good heat dissipation.
Electrical Properties				
Threshold Current (Ith)		70mA	90mA	
Operating Current (Iop)		220(mA)	260(mA)	At Po = 110mW & Tcase = 25°C
Operating Voltage (Vop)		2.6V	3V	At Po = 110mW & Tcase = 25°C
Reverse Breakdown Voltage (VR)		2V		
Fiber Type				
Numerical Aperture (NA)		0.12		
Fiber Model	HP630/PM630(4/125)			Customizable
Fiber Length	>1.0 m			Customizable
Ferrule Specifications	0.9 black loose tube			Customizable
Output Connector	Bare fiber or FC/APC			Customizable
Storage Conditions				
Storage Humidity	5% ~ 85% RH			No condensation
Storage Temperature	-20 ~ 60°C			No condensation