


940 nm Single-Mode/Polarization-Maintaining Pigtail Laser

Dimensions

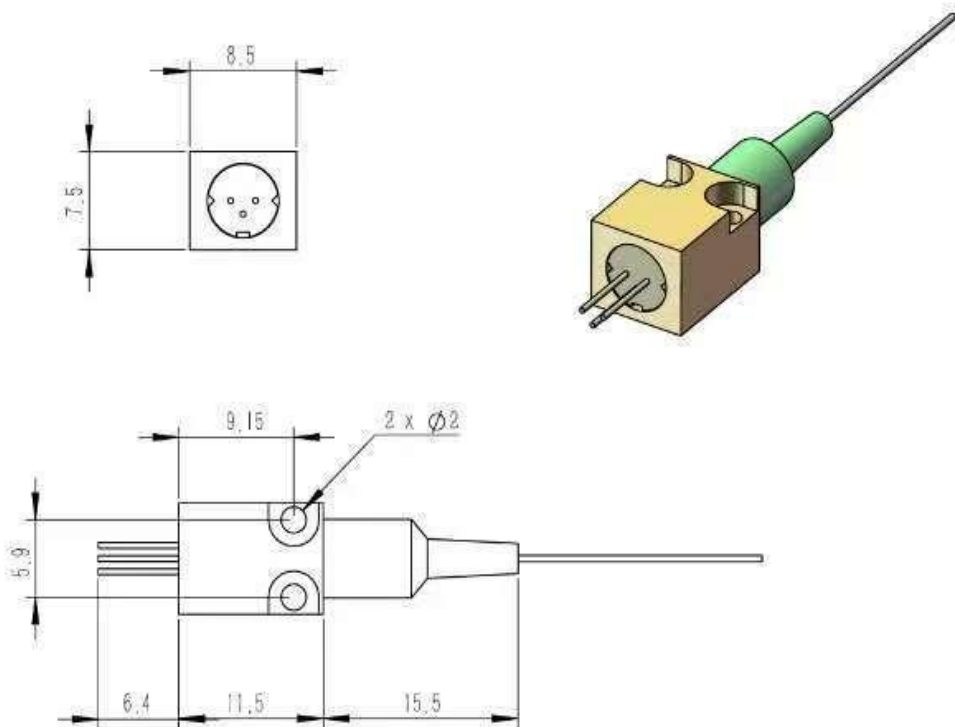

Features:

- High output power
- Excellent beam quality
- High reliability

Applications:

- Atomic Analysis
- Sensing and Measurement
- Industrial Processing

940 nm Single-Mode/Polarization-Maintaining Pigtail Laser

Specifications

Parameters	Min.	Typical	Max.	Test Conditions
Optical Properties				
Center Wavelength	930nm	940nm	950nm	At Po = 120mW & Tcase = 25°C
Output Power (Po)		120mW	150mW	At Tcase = 25°C, Iop = 330mA
Power Stability			±1%	
Beam Quality (M ²)			1.1	
Operating Temperature (Tcase)	-10°C	25°C	45°C	Using a base with good heat dissipation.
Electrical Properties				
Threshold Current (Ith)		40mA	70mA	
Operating Current (Iop)		300(mA)	340(mA)	At Po = 120mW & Tcase = 25°C
Operating Voltage (Vop)		2.4V	3V	At Po = 120mW & Tcase = 25°C
Reverse Breakdown Voltage (VR)		2V		
Fiber Type				
Numerical Aperture (NA)		0.13		
Fiber Model	SMF28E/PM980(9/125 /6/125)			Customizable
Fiber Length	>1.0 m			Customizable
Ferrule Specifications	0.9 black loose tube			Customizable
Output Connector	Bare fiber or FC/APC			Customizable
Storage Conditions				
Storage Humidity	5% ~ 85% RH			No condensation
Storage Temperature	-20 ~ 60°C			No condensation